





Circle. Round. **Tour**

Tour

Rigorous harmony

Circular suspension, severe and essential, aluminum body and opal diffuser, provided by topLED source internal power supply, warm and diffusive light. Three lighting options: direct, indirect and peripheral. Available in two installations option, parallel or stayed cables.

- + essential design
- + different lightin options
- + LED source





Construction details

Thanks to the latest generation machinery, we are able to control every minimum stretching sections' deformation due to the curvature. Tour's frame is composed by a calendered and powder coated extruded aluminum.


No power cable is visible, the topLEDs are powered by special extra thin steel suspension cables.

A special patented snap system provides installation of the opal polycarbonate screen along the profile, eliminating all visible joints.




Range

Four different diameters defined by an extra slim section, makes this suspension very light and neutral, a perfect solution when a wide and diffusive lighting is needed.

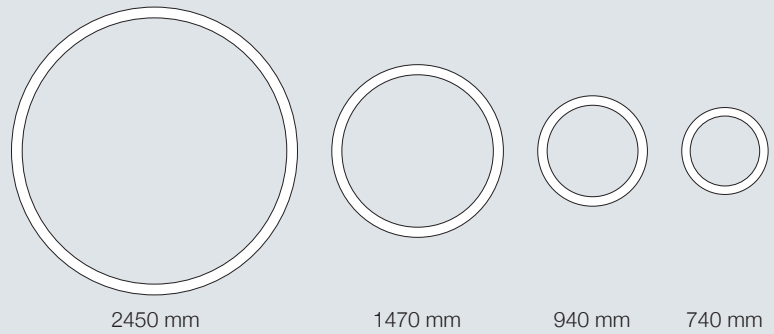


Emissions

Tour proposes three different emissions: direct, indirect and lateral. Three combinable lighting effects, able to transform spaces with a single minimal and contemporary sign of light.

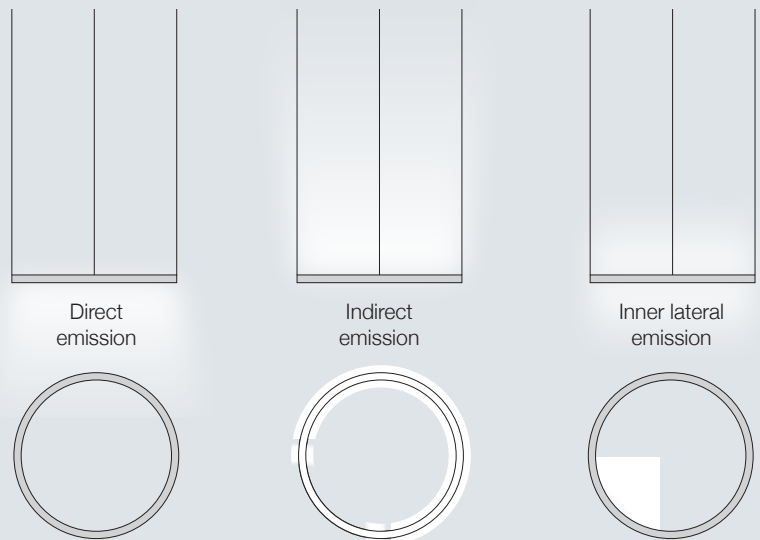

Installation

Installation system provides different solutions for every application: Tour can be installed with convergent cable in a single central point or with customized tiege designed to maintain a perfect perpendicular cables' traction. Ideal solution when multiple composition is needed.

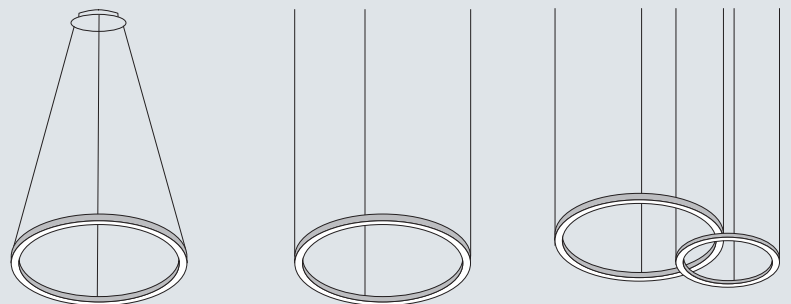







Configuration with central ceiling rose

Implementation of a Tour_PD layout with ON / OFF ceiling rose.


Tour model selection

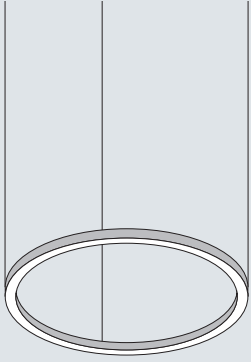

Ceiling rose selection

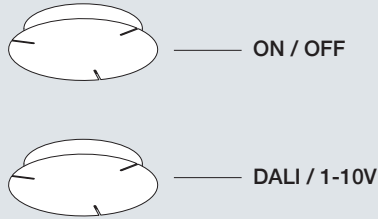

Final outcome

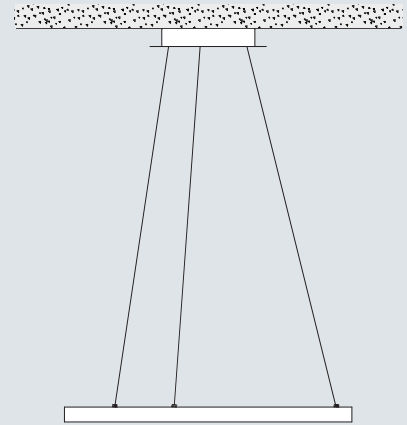

Order example:

n.1 art. 64570
(Tour_PD1)


+

n.1 art. 64574
(ON/OFF)

Configuration with remote driver

Implementation of a Tour_PU layout with DALI remote driver.


Tour model selection

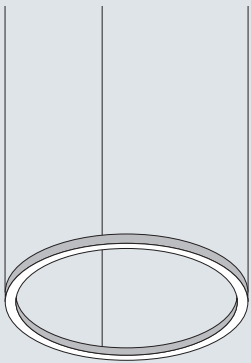


Suspension kit selection



Driver selection

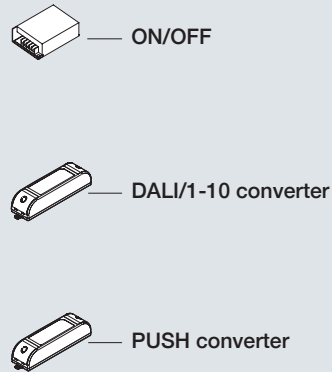

Final outcome

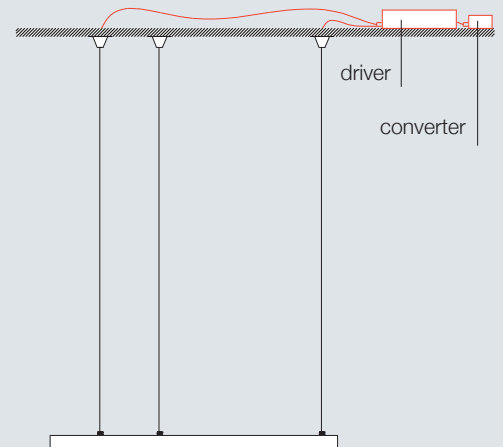

Order example:

n.1 art. 64570
(Tour_PD1)


+

n.1 art. 64575
(Suspensions)

+

n.1 art. 84700 (driver ON/OFF)
n.1 art. 99074 (DALI/1-10V converter)

Tour_PD1 | Pendant Luminaires | topLED 26,5 W 24 V



Direct emission

type

White 64570

colour

3000 K 4678 lm W

optics

diffused 00

Central canopy

Driver integrated



64574

Canopy
ON/OFF

64582

Canopy
DALI/1-10V

Straight cables


Driver remote




64575

Suspensions
3pcs

84700

Switching
24V


99074

DALI/1-10V
converter

99077

PUSH
converter

Tour_PD2 | Pendant Luminaires | topLED 32 W 24 V



Direct emission

type

White 64571

colour

3000 K 5847 lm W

optics

diffused 00

Central canopy

Driver integrated



64578

Canopy
ON/OFF

64586

Canopy
DALI/1-10V

Straight cables

Driver remote




64575

Suspensions
3pcs

84700

Switching
24V


99074

DALI/1-10V
converter

99077

PUSH
converter

Tour_PD3 | Pendant Luminaires | topLED 51 W 24 V



Direct emission

type

White 64572

colour

3000 K 9355 lm W

optics

diffused 00

Central canopy

Driver integrated



64578

Canopy
ON/OFF

64586

Canopy
DALI/1-10V

Straight cables


Driver remote




64575

Suspensions
3pcs

84700

Switching
24V


99074

DALI/1-10V
converter

99077

PUSH
converter

Tour_PD4 | Pendant Luminaires | topLED 88 W 24 V

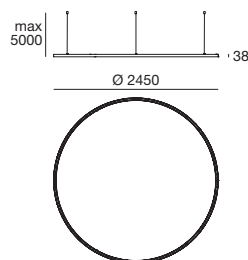

Direct emission

type

White 64573

colour

3000 K 15588 lm W

optics

diffused 00

Central canopy

Driver integrated



64580

Canopy
ON/OFF

64588

Canopy
DALI/1-10V

Straight cables


Driver remote




64575

Suspensions
3pcs

84701


Switching
24V

64576

DALI
converter

99332

1-10V


Tour_PI1 | Pendant Luminaires | stripLED 29 W 24 V


Internal side emission

type

White

64577**colour**

3000 K

3000 lm

optics


W

diffused **00****Central canopy**

Driver integrated

**64574**Canopy
ON/OFF**64582**Canopy
DALI/1-10V**Straight cables**

Driver remote

**64575**Suspensions
3pcs**84700**Switching
24V**99074**DALI/1-10V
converter**99077**PUSH
converter
Tour_PI2 | Pendant Luminaires | stripLED 35,5 W 24 V


Internal side emission

type

White

64579**colour**

3000 K

3785 lm

optics


W

diffused **00****Central canopy**

Driver integrated

**64578**Canopy
ON/OFF**64586**Canopy
DALI/1-10V**Straight cables**

Driver remote

**64575**Suspensions
3pcs**84700**Switching
24V**99074**DALI/1-10V
converter**99077**PUSH
converter
Tour_PI3 | Pendant Luminaires | stripLED 57,5 W 24 V


Internal side emission

type

White

64581**colour**

3000 K

6000 lm

optics

W

diffused **00****Central canopy**


Driver integrated

**64578**Canopy
ON/OFF**64586**Canopy
DALI/1-10V**Straight cables**

Driver remote

**64575**Suspensions
3pcs**84700**Switching
24V**99074**DALI/1-10V
converter**99077**PUSH
converter

Tour_PU1 | Pendant Luminaires | topLED 26,5 W 24 V



Indirect emission

type

White

64583

colour

3000 K 4678 lm

optics

diffused 00

Central canopy

Driver integrated



64574

Canopy
ON/OFF

64582

Canopy
DALI/1-10V

Straight cables

Driver remote



64575

Suspensions
3pcs

84700

Switching
24V


99074

DALI/1-10V
converter

99077

PUSH
converter

Tour_PU2 | Pendant Luminaires | topLED 32 W 24 V



Indirect emission

type

White

64584

colour

3000 K 5847 lm

optics

diffused 00

Central canopy

Driver integrated



64578

Canopy
ON/OFF

64586

Canopy
DALI/1-10V

Straight cables

Driver remote



64575

Suspensions
3pcs

84700

Switching
24V


99074

DALI/1-10V
converter

99077

PUSH
converter

Tour_PU3 | Pendant Luminaires | topLED 51 W 24 V



Indirect emission

type

White

64585

colour

3000 K 9355 lm

optics

diffused 00

Central canopy

Driver integrated



64578

Canopy
ON/OFF

64586

Canopy
DALI/1-10V

Straight cables

Driver remote



64575

Suspensions
3pcs

84700

Switching
24V


99074

DALI/1-10V
converter

99077

PUSH
converter

Tour_PU4 | Pendant Luminaires | topLED 88 W 24 V

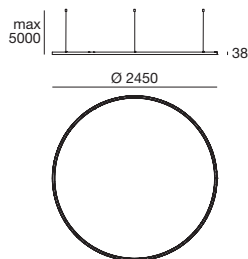

Indirect emission

type

White

64587

colour

3000 K 15588 lm

optics

diffused 00

Central canopy

Driver integrated



64580

Canopy
ON/OFF

64588

Canopy
DALI/1-10V

Straight cables

Driver remote



64575

Suspensions
3pcs

84701

Switching
24V

64576

DALI
converter

99332

1-10V



